

JC10 Rec'd PCT/PTO 17 DEC 2001

FORM PTO-1390 REV. 5-93		US DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE	ATTORNEYS DOCKET NUMBER P01,0351
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371			U.S. APPLICATION NO. (if known, see 37 CFR 1.5) 10/018850
INTERNATIONAL APPLICATION NO. PCT/EP00/06026	INTERNATIONAL FILING DATE 28 June 2000	PRIORITY DATE CLAIMED 30 June 1999	
TITLE OF INVENTION "METHOD AND DEVICE FOR PRINTING A BASE MATERIAL AND CLEANING A PRINTING ROLLER"			
APPLICANT(S) FOR DO/EO/US Martin BERG and Manfred WIEDEMER			
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:			
1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371. 2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371. 3. <input checked="" type="checkbox"/> This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay. 4. <input checked="" type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date. 5. <input checked="" type="checkbox"/> A copy of International Application as filed (35 U.S.C. 371(c)(2)) a. <input checked="" type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau). b. <input type="checkbox"/> has been transmitted by the International Bureau. c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US) 6. <input checked="" type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2)). 7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. §371(c)(3)) a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau). b. <input type="checkbox"/> have been transmitted by the International Bureau. c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired. d. <input checked="" type="checkbox"/> have not been made and will not be made. 8. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)). 9. <input type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). 10. <input type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)). Items 11. to 16. below concern other document(s) or information included: 11. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 C.F.R. 1.97 and 1.98; (PTO 1449, Prior Art, Search Report). 12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 C.F.R. 3.28 and 3.31 is included. (SEE ATTACHED ENVELOPE) <input checked="" type="checkbox"/> A FIRST preliminary amendment. <input checked="" type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment. 14. <input checked="" type="checkbox"/> A substitute specification & marked up version of application. 15. <input type="checkbox"/> A change of power of attorney and/or address letter. 16. <input checked="" type="checkbox"/> Other items or information: a. <input checked="" type="checkbox"/> Submittal of Drawings b. <input checked="" type="checkbox"/> EXPRESS MAIL #EL 843743855 US, dated December 17, 2001.			

U.S. APPLICATION NO. (unknown, see 37 C.F.R. 1.5)

INTERNATIONAL APPLICATION NO.
PCT/EP00/06026ATTORNEY'S DOCKET NUMBER
P01,0351

1013 Rec'd PCT/PTO 17 DEC 2001

10/018850

17. ☒ The following fees are submitted:**BASIC NATIONAL FEE (37 C.F.R. 1.492(a)(1)-(5):**

Search Report has been prepared by the EPO or JPO \$890.00

International preliminary examination fee paid to USPTO (37 C.F.R. 1.482) \$710.00

No international preliminary examination fee paid to USPTO (37 C.F.R. 1.482) but
international search fee paid to USPTO (37 C.F.R. 1.445(a)(2)) \$740.00Neither international preliminary examination fee (37 C.F.R. 1.482) nor international search
fee (37 C.F.R. 1.445(a)(2)) paid to USPTO \$1040.00International preliminary examination fee paid to USPTO (37 C.F.R. 1.482) and all claims
satisfied provisions of PCT Article 33(2)-(4) \$ 100.00**ENTER APPROPRIATE BASIC FEE AMOUNT =**

CALCULATIONS

PTO USE ONLY

\$ 890.00

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30 months from the
earliest claimed priority date (37 C.F.R. 1.492(e)).

\$

Claims

Number Filed

Number
Extra

Rate

Total Claims

22 - 20 =

2

X \$ 18.00

\$ 36.00

Independent Claims

2 - 1 =

0

X \$ 84.00

\$.00

Multiple Dependent Claims

\$280.00 +

\$

TOTAL OF ABOVE CALCULATIONS =

\$ 926.00

Reduction by 1/2 for filing by small entity, if applicable. Verified Small Entity statement must also be
filed. (Note 37 C.F.R. 1.9, 1.27, 1.28)

\$

SUBTOTAL =

\$ 926.00

Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30 months from
the earliest claimed priority date (37 CFR 1.492(f)).

\$

+

TOTAL NATIONAL FEE =

\$ 926.00

Fee for recording the enclosed assignment (37 C.F.R. 1.21(h). The assignment must be
accompanied by an appropriate cover sheet (37 C.F.R. 3.28, 3.31). \$40.00 per property

+

TOTAL FEES ENCLOSED =

\$ 926.00

Amount to be
refunded

\$

charged

\$

a. ☒ A check in the amount of \$ 926.00 to cover the above fees is enclosed.b. ☐ Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees. A duplicate copy
of this sheet is enclosed.c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment
to Deposit Account No. 501519. A duplicate copy of this sheet is enclosed.NOTE: Where an appropriate time limit under 37 C.F.R. 1.494 or 1.495 has not been met, a petition to revive (37 C.F.R. 1.137(a) or (b)) must be
filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Schiff Hardin & Waite
Patent Department
6600 Sears Tower
Chicago, Illinois 60606

SIGNATURE

Melvin A. Robinson

NAME

31,870

Registration Number

CUSTOMER NO. 26574

IN THE UNITED STATES ELECTED OFFICE
OF THE UNITED STATES PATENT AND TRADEMARK OFFICE
UNDER THE PATENT COOPERATION TREATY-CHAPTER II

"PRELIMINARY AMENDMENT"

5 APPLICANT: Martin BERG et al.

SERIAL NO.: EXAMINER:

FILING DATE: ART UNIT:

INTERNATIONAL APPLICATION NO.: PCT/EP00/06026

INTERNATIONAL FILING DATE: 28 June 2000

10 INVENTION: Method and device for printing a base material and cleaning a
printing roller

Hon. Assistant Commissioner for Patents
Box PCT
Washington D.C. 20231

15 SIR:

Amend the above-identified international application before entry into the national stage before the U.S. Patent & Trademark Office under 35 U.S.C. §371 as follows:

IN THE SPECIFICATION

20 Enclosed is a Substitute Specification that has been amended to place the
International application into form for U.S. prosecution. Also enclosed is a marked up
version of the specification showing the changes made to the original application which
resulted in the substitute specification.

21. A method according to claim 19, wherein the cleaning station contains a stripper drum that lies parallel to the cleaning drum and whose surface exerts pressure onto the surface of the cleaning drum in a stripping region; and the surface of the stripper drum is fabricated of a hard material.

5 22. A method according to claim 18, further comprising the step of:
cleaning emptied depressions with a cleaning fluid after the removal of the printing fluid from depressions moving past the cleaning station and before the introduction of printing fluid into depressions moving past the inking station.

10 23. A method according to claim 22, wherein the cleaning station contains a cleaning container with a cleaning fluid; and further comprising the step of:
immersing the depressions moving past the cleaning container into the cleaning fluid.

24. A method as claimed in claim 23, wherein said container with a cleaning fluid is arranged under the printing drum.

15 25. A method according to claim 22, further comprising the step of:
utilizing the printing fluid as the cleaning fluid.

26. A method according to claim 23, further comprising the step of:
utilizing additional measures to remove the cleaning fluid.

27. A method as claimed in claim 26, wherein said additional measures include application of ultrasound.

28. A method according to claim 18, further comprising the step of:
directing a stream of air to displace printing fluid out of the depressions moving past the
cleaning station.

29. A method as claimed in claim 28, wherein said cleaning station contains a
blower unit to generate said stream of air.

30. A method according to claim 18, further comprising the step of:
drawing in a stream of air at the cleaning station to entrain printing fluid from the
depressions moving past the cleaning station.

31. A method according to claim 18, further comprising the steps of:
collecting the printing fluid removed with by the cleaning station; and
conducting the collected printing fluid to the inking station.

32. A method according to claim 31, further comprising the step of:
cleaning the printing fluid.

33. A method as claimed in claim 31, further comprising the step of:
rejuvenating the printing fluid.

34. A printer device for printing a carrier material, comprising:
a printing drum rotating around its longitudinal axis during the printing event and on whose
surface a plurality of depressions for the acceptance of printing fluid are arranged;
an inking station for introducing printing fluid into depressions that move past the inking
station;

a transfer printing station at which printing fluid from some of the depressions moving past the transfer printing location is employed for printing the carrier material, and at which the printing fluid remains in the rest of the depressions moving past the transfer printing station;

5 a cleaning station for removing printing fluid from depressions that move past the cleaning station; and

a control unit for actuation of the cleaning station, the control unit simultaneously places the cleaning station and the inking station into operation during the printing event.

35. A printer device according to claim 34, further comprising:

10 a cleansing station for cleansing the depressions emptied in the cleaning station with a cleaning fluid.

36. A printer device according to claim 34, wherein the cleaning station includes a cleaning drum that lies parallel to the printing drum and whose surface touches a surface of the printing drum in a cleaning region; and further comprising:

15 a connection for applying an electrical potential to surface of the cleaning drum which differs from a potential at the surface of the printing drum.

37. A printer device according to claim 36, wherein the cleaning station includes a stripper drum that lies parallel to the cleaning drum and whose surface presses onto the surface of the cleaning drum in a stripping region.

20 38. A printer device according to claims 34, wherein the cleaning station includes a blower unit with whose assistance air is blown into the depressions moving past the cleaning station.

39. A printer device as claimed in claim 34, wherein the cleaning station includes a suction unit with whose assistance air is sucked out of the depressions moving past the cleaning station.

IN THE ABSTRACT

Please add the abstract in the following separate page.

Abstract of the Disclosure


A printer has a printing drum with recesses on the surface thereof into which ink is provided for printing. After printing, any remaining ink is removed at a cleaning station including immersion in a fluid, air jets, or an air suction. The cleaning station and the inking station operate simultaneously.

5

REMARKS

The foregoing amendments to the specification and claims under Article 41 of the Patent Cooperation Treaty place the application into a form for prosecution before the U.S. Patent and Trademark Office under 35 U.S.C. §371. Accordingly, entry of these
5 amendments before examination on the merits is hereby requested.

Respectfully submitted,



Melvin A. Robinson (reg. no. 31,870)

Patent Department

Schiff Hardin & Waite

6600 Sears Tower

Chicago, Illinois 60606

Telephone: 312-258-5785

CUSTOMER NO. 26574

ATTORNEY FOR APPLICANT

Sub SPEC
5/p/b

30107078840-15012
JC13 Rec'd PCT/PTO 17 DEC 2001

SPECIFICATION

TITLE

"METHOD AND PRINTER DEVICE FOR PRINTING A CARRIER MATERIAL AND FOR CLEANING A PRINTING DRUM"

5

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention is directed to a method for printing a carrier material, whereby a printing drum with a plurality of depressions arranged on the surface of the printing drum for the acceptance of printing fluid turns around its longitudinal axis during a printing event. With the assistance of an inking station, printing fluid is introduced during the printing event into all depressions that move past the inking station. At a transfer printing location, the printing fluid contained in some of the depressions moving past the transfer printing location is employed for printing the carrier material. The printing fluid in the other depressions moving past the transfer printing location remains in the depressions.

Description of the Related Art

European Letters Patent EP 0 756 544 B1 discloses a thermoelectric printing unit for the transfer of an ink onto a recording medium. An inking station, a transfer printing station and a cleaning station are arranged around a printing drum having a plurality of depressions for the acceptance of ink. Only the inking station and the transfer printing station are in operation during the printing event. The depressions proceed to the inking station after they have passed by the transfer printing station. Printing fluid is re-introduced into the emptied depressions at the inking station. The cleaning station is actuated only after the end of the printing event.

German Patent Document DE 295 07 416 U1 discloses a rotogravure unit wherein a rotogravure printing cylinder has ink-accepting depressions at image

locations and no such depressions at non-imaging locations. The depressions are filled with ink at an inking station. This ink is transferred onto a rubber cylinder for later transfer onto paper. Subsequently, the ink residues are washed from the depressions of the image locations on the rotogravure printing cylinder with the assistance of a water jet and are thus removed.

German Patent Document DE 195 44 099 A1 discloses a thermographic printer device wherein a glass cylinder has a cup structure on its generated surface, the cups thereof being filled with ink. The ink in the cups is solidified with the assistance of a cooling device. In a printing zone, the ink in selected cups is melted with the assistance of laser light dependent on the image structure to be printed and is transferred onto paper. A doctor blade strips the residues of the ink from the surface of the inking cylinder, the cups thereof being subsequently re-filled with ink.

German Patent Document DE 195 03 951 A1 discloses a rotogravure method, whereby a rotogravure printing cylinder is filled with ink in depressions at imaging locations, said ink being directly printed onto a carrier material. After the printing event, the specific depressions are cleaned of ink residues and re-filled with ink for a further printing event.

German Patent Document DE 16 11 272 C2, further, discloses an offset rotary printing press that has a printing cylinder on whose generated surface a planographic form is Chucked. This planographic form accepts ink in depressions that correspond to image locations to be inked, the ink being supplied via an ink application roller. The ink that is not picked up by the printing cylinder is removed from the ink application roller and is supplied to the ink circulation.

SUMMARY OF THE INVENTION

An object of the invention is to provide a method for printing a carrier material that is simple and enables a printing with high printing quality. Moreover, a printer device suitable for the implementation of the method should be recited.

5 The object relating to the method is achieved with the method steps for printing a carrier material, whereby a printing drum having a plurality of depressions for the acceptance of printing fluid arranged on the surface of the printing drum rotates around its longitudinal axis during a printing event, printing fluid is introduced by an inking station into depressions moving past the inking station, printing fluid
10 from some of the depressions moving past a transfer printing location is employed at the transfer printing station for printing the carrier material, and printing fluid remains in the rest of the depressions, printing fluid is removed by a cleaning station from depressions moving past the cleaning station, and whereby the cleaning station and the inking station are simultaneously in operation during the printing event.

15 In the preferred method, the cleaning station contains a cleaning drum that lies parallel to the printing drum and whose surface touches the surface of the printing drum in a cleaning region during cleaning; and the surface of the cleaning drum is manufactured of an elastic or absorbent material. The cleaning drum may carry a potential that differs from a potential on the surface of the printing drum.
20 Specifically, the cleaning station contains a stripper drum that lies parallel to the cleaning drum and whose surface exerts pressure onto the surface of the cleaning drum in a stripping region; and the surface of the stripper drum is fabricated of a hard material. In one embodiment, the emptied depressions are cleaned with a cleaning fluid after the removal of the printing fluid from depressions moving past the

In other embodiments of the invention, the cleaning station contains a blower unit that, with the assistance of air, displaces printing fluid out of the depressions moving past the cleaning station. In the present method, the cleaning station contains a suction unit with whose assistance air is sucked in, the air entraining printing fluid from the depressions moving past the cleaning station. The printing fluid removed with the assistance of the cleaning station is collected; and the collected printing fluid is conducted to the inking station.

Further advantages of the invention are realized in an embodiment wherein the printing fluid is cleaned and/or rejuvenated.

A printer device for printing a carrier material is also provided wherein a printing drum rotating around its longitudinal axis during the printing event and on whose surface a plurality of depressions for the acceptance of printing fluid are arranged,

an inking station for introducing printing fluid into depressions that move past the inking station, a transfer printing station at which printing fluid from some of the depressions moving past the transfer printing location is employed for printing the carrier material, and at which the printing fluid remains in the rest of the depressions

moving past the transfer printing station, a cleaning station for removing printing fluid from depressions that move past the cleaning station, and a control unit for the actuation of the cleaning station and of the inking station, the control unit simultaneously places the cleaning station and the inking station into operation during the printing event.

In the printer device, a cleansing station for cleansing the depressions emptied in the cleaning station with a cleaning fluid may be provided. The cleaning station may contain a cleaning drum that lies parallel to the printing drum and whose surface touches the surface of the printing drum in a cleaning region; and the surface of the cleaning drum preferably carries a different potential than the surface of the printing drum. Preferably, the cleaning station contains a stripper drum that lies parallel to the cleaning drum and whose surface presses onto the surface of the cleaning drum in a stripping region. The cleaning device may contain a blower unit with whose assistance air is blown into the depressions moving past the cleaning station; and/or the cleaning station contains a suction unit with whose assistance air is sucked out of the depressions moving past the cleaning station.

The invention proceeds on the basis of the perception that a printing having high printing quality can only be achieved when all depressions are completely emptied before the depressions are transported past the inking station and are filled anew with printing fluid by the inking station. This is particularly significant in printing methods wherein the volume of a respective depression prescribes the volume of printing fluid to be applied onto a picture element. Even given depressions whose printing fluid is used during printing, it is not assured that all of the printing fluid can be applied onto the carrier material. This is especially true when, due to adhesive

forces between the printing fluid and the carrier material, the printing fluid is drawn toward the carrier material. In this case, forcing the printing fluid out of the depression is foregone, this, for example, being implemented with the assistance of a gas bubble.

5 The inventive method therefore employs a cleaning station that removes the printing fluid from the depressions moving past the cleaning station. The cleaning station and the inking station operate simultaneously during the printing event. In the inventive method, thus, the printing fluid is removed from all of the depressions before the depressions are employed in a new printing event. Due to the removal of
10 the printing fluid at the cleaning station, the printing fluid is also prevented from drying on the sidewalls of the depressions during the printing event. The volume capacity of the depressions remains unchanged during the entire printing event. The printing fluid is also prevented from remaining in a depression over a plurality of
15 revolutions of the printing drum and physically or chemically changing during this time, for example in terms of viscosity or composition when highly volatile tensides are contained in the printing fluid.

 What the utilization of the inventive method achieves is that a prescribed quantity of printing fluid having a prescribed composition and prescribed physical parameters can be employed for each picture element even given a continuous
20 printing mode. The result is a print image having a high quality.

 In a development of the inventive method, the cleaning station contains a cleaning drum that lies parallel to the printing drum and whose surface touches the surface of the printing drum in a cleaning region during cleaning. The surface of the cleaning drum is manufactured of an elastic or of an absorbent material that can be

pressed into the depressions. The employment of a cleaning drum is a simple possibility for removing the printing fluid that remains in the depressions. Given an elastic surface of the cleaning drum, this can be pressed against the printing drum in an enlarged cleaning region. The printing fluid remaining in the depressions thus has comparatively more time to attach to the surface of the cleaning drum. Cleaning drums at whose surface bristles are arranged are also employed. The cleaning device must be pressed tightly against the printing drum in order to avoid contamination of the printing unit due to printing fluid that spatters during brushing.

In another development, the cleaning drum carries an electrical potential that differs from the potential of the surface of the printing drum. This measure facilitates the release of the printing fluid from the depressions because the electrostatic forces attract the printing fluid out of the depression, it acts in addition to the adhesion forces between printing fluid and surface of the cleaning drum. Potentials having different operational signs are also employed.

In a next development, the cleaning station, in addition to containing the cleaning drum, contains a stripper drum lying parallel to the cleaning drum whose surface exerts pressure onto the surface of the cleaning drum in a stripping region. The surface of the stripper drum is made of a hard material, for example of metal. Whereas absorbent material can be damaged when being squeezed by a doctor blade, stripping the printing fluid from the stripper drum can be carried out without damage. The stripper drum has a smooth surface on which the doctor blade lies well.

In one development of the inventive method, the emptied depressions are cleaned with a cleaning fluid after the emptying of the printing fluid from the

depressions by moving the depressions past the cleaning station before the introduction of the printing fluid into the depressions moving past the inking station. The cleaning step leads to a more thorough emptying and cleaning of the depression and assures that the printing fluid is always filled into the depressions in the inking station under constant conditions. During cleaning, dirt particles are also removed from the edges of the depressions, the dirt particles being produced, for example, due to abrasion of the carrier material or by abrasion at the edges of the depressions.

In a next development, the cleaning fluid is contained in a cleaning container arranged under the printing drum. The depressions move past the cleaning container immersed into the cleaning fluid. The immersion assures that the cleaning fluid is forced into the depressions with a specific pressure. Moreover, the cleaning fluid is agitated due to the immersion. The increased pressure and the movement of the cleaning fluid lead to a better removal of the dirt particles seated at the sidewalls of the depressions. In a next development, the printing fluid is employed as a cleaning fluid, so that additional cleaning fluids can be foregone. When, however, a very thorough cleaning is important, then solvents are employed as the cleaning fluid.

In a next development, the cleaning fluid is moved by additional measures that proceed beyond the movement of the cleaning fluid due to the immersion of the printing drum. The employment of ultrasound assures that dirt particles that adhere very firmly to the sidewalls can also be released. Moreover, larger dirt particles are comminuted by the ultrasound.

In one development of the inventive method, the cleaning station contains a blower with whose assistance air is blown into the depressions moving past the cleaning station. When the air is blown into the depressions, the printing fluid is blown out at the same time. Blowing the air in is implemented instead of or in combination with the cleaning by the cleaning drum.

In a next development, a suction pump is employed in the cleaning station, to suction air out of the depressions moving past the cleaning station. Any printing fluid remaining in the depressions is also removed simultaneously with the air. No spattering of printing fluid occurs in the suctioning process, so that measures to prevent spattering printing fluid need not be undertaken.

When, in a next development, the printing fluid that has been removed in the cleaning station is collected and conducted to the inking station, then a circulation derives for the printing fluid that assures that the printing fluid can be completely printed.

In a next development, the printing fluid is cleaned and/or rejuvenated as it is carried in the printing fluid circulation. Filtering makes it possible to remove foreign bodies and ink particles that have already dried from the printing fluid. A rejuvenation of the printing fluid may involve in, for example, introducing additives such as water or solvent into the printing fluid.

The invention also applies to a printer device that is employed for the implementation of the inventive method. The technical effects indicated above thus also apply to the inventive printer device and developments thereof.

BRIEF DESCRIPTION OF THE DRAWINGS

Exemplary embodiments of the invention are explained below on the basis of the attached drawings.

Figure 1 is an enlarged cross section of a portion of a printing drum.

Figure 2 is a schematic diagram of a printing unit of a printer.

Figure 3 is a schematic diagram of a cleaning station with a cleaning drum and an ultrasound bath.

Figure 4 is a magnified illustration of a cleaning region.

Figure 5 is a cleaning station with a potential-carrying cleaning drum.

Figure 6 is a cleaning station with a blower.

Figure 7 is a cleaning station with a suction unit.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Figure 1 shows a longitudinal section along the surface 8 of a printing drum 10. A plurality of depressions arranged matrix-like are located in the surface 8 of the printing drum 10, two depressions 12 and 14 thereof being shown in Figure 1. The depressions are arranged next to one another in a row direction, see arrow 16. Neighboring depressions 12 and 14 have a spacing A from one another that determines the resolution of the printer. A plurality of rows of depressions are arranged following one another in column direction 18, whereby neighboring depressions with a column also have a spacing from one another that corresponds to the spacing A. The depressions are all identically constructed, so that the structure of only the depression 12 is explained below.

The depression 12 is fashioned as a conoidal frustum-shaped recess (see contour 20) and thus has circular crosssections. The axis of the conoidal frustum lies in the direction of the normal of the surface 8. The conoidal frustum-shaped contour 20 tapers with increasing distance from the surface 8 of the printing drum 10. A bottom surface 24 of the depression 12 has a smaller diameter than the opening 26 of the depression 12 lying on the surface of the printing drum 10. The circumference of the opening 26 lies on a circle and prescribes the shape of the picture elements to be printed.

An all-around sidewall 28 of the depression 12 is arranged obliquely relative to the surface 8 of the printing drum 10. The filling of a chromatic ink 30 is facilitated by the conoidal frustum-shaped fashioning of the depression 12. The ink 30 is held within the depression 12 by capillary forces. The capillary forces are greater than the force of gravity the earth exerts on the ink 30, so that the ink also remains within the depression 12 when the opening 26 is directed down, i.e. toward the center of the earth. After the filling of the ink 30 and the squeegeeing of the printing drum 10 with a doctor blade, the surface 32 of the ink 30 has a surface tension at which a convex curvature occurs, i.e. the surface 32 of the ink 30 is arced inward. The surface 32 is in a condition I wherein a wetting angle RI has a value of approximately 45° . The wetting angle RI is described by a vector VI of the surface tension on the surface 30 and by the side wall 28. The vector VI begins at the edge of the depression 12, i.e. at a location at which the fluid 30 adjoins the sidewall 28 or, respectively, surface 8. The volume capacity of the depression 12 is selected such that exactly that quantity of ink 30 that is required for printing a single picture element is accepted.

How a condition II of the surface 36 of the ink 34 affects the printing event shall be explained below on the basis of a printing fluid 34 within the depression 14. After being filled into the depression 14, the ink 34 also has an inwardly arced, i.e. concave, surface. The surface tension of the ink 34 was increased due to the evaporation of tensides with the assistance of an exposure device (shown at the bottom in Figure 2), as a result whereof the surface 36 has arced outward. A wetting angle RII between a surface tension vector VII and the sidewall of the depression 14 has a value of somewhat above 90°. The vector VII begins at the sidewall of the depression 14 and proceeds in the direction of the surface tension of the surface 36. The starting point of the surface tension vector VII lies at the boundary between printing fluid 34 and the sidewall of the depression 14. A middle region 38 of the surface 36 projects beyond the surface 8 of the printing drum 10 by a distance B. When the depression 14 is conducted past paper to be printed upon at a distance that is less than the distance B, then a wetting of the paper occurs. The adhesion forces between the paper and the printing fluid 34 are higher than the capillary forces between printing fluid 34 and depression 14. All of the printing fluid 34 is therefore drawn out of the depression 14 and inks a region on the paper that is provided for a picture element.

Figure 2 shows a printing unit 50 of a printer that has a resolution of 600 dpi (dots per inch). A printing drum 10a turns in counter-clockwise direction, see arrow 52. The devices enumerated below are successively arranged along the circumferential direction of the printing drum 10a.

At the beginning of a revolution of the printing drum 10a, the depressions for printing a row that extend in a longitudinal direction of the printing drum 10a are free

of the printing fluid, see position P1. Ink 56 is filled into the depressions of a row at an inking station 54. The inking station 54 contains a scoop drum 58 whose axis proceeds parallel to the axis of the printing drum 10a. At the position P2, the surface of the scoop drum 58 touches the surface of the printing drum 10a. The scoop drum 58 turns in a direction opposite that of the printing drum 10a, see arrow 60. The lower part of the scoop drum 58 immerses into the ink 56 held by a reservoir 62, so that the surface of the scoop drum 58 is moistened with ink when the surface reaches the position P2. Due to the capillary forces, the ink 56 is drawn from the surface of the scoop drum 58 into the depressions 12, 14 of the printing drum 10a, which is located at position P2.

A doctor blade 64 is situated at a position P3, the doctor blade 64 sweeping over the surface of the printing drum 10a such that no ink remains on the surface of the printing drum 10a outside the depressions. After being swept with the doctor blade 64, the ink in all depressions respectively has an inwardly arced surface.

The depressions of a row filled with ink 56 are subsequently transported by rotation of the printing drum 10a to a position P4 at which an exposure device 70 modifies the surface tension in selected depressions. The exposure device 70 contains a tubular flashbulb 72 whose longitudinal axis is arranged parallel to the longitudinal axis of the printing drum 10a. A reflector 74 that extends along the flashbulb 72 and has an arcuate crosssection is located at that side of the flashbulb 72 facing away from the printing drum 10a. The flashbulb 72 is located roughly in the focus of the reflector 74. The exposure device 70 also contains a line composed of ceramic cells 76 arranged next to one another whose transparency can be varied with the assistance of a control voltage. When exposing a row of depressions at the

position P4, exactly one ceramic cell 76 is located opposite each depression. The ceramic cells 76 are transparent, ferroelectric ceramic laminae. Such ceramic laminae are known in the field of optoelectronics. For example, such ceramic laminae are disclosed as PLZT elements in European Letters Patent EP 0 253 300 B1. However, optoelectronic elements that work according to the Kerr principle are also employed. The exposure device 70 is controlled by a drive device 78 dependent on print data 80 that define the picture elements of the print image to be printed. A clock signal 84 that clocks the flashbulb 72 synchronously with the revolution of the printing drum 10a is generated at a first output line 82 of the drive device 78, so that each row of depressions that is moved past the position P4 is irradiated exactly once by the flashbulb 72.

Output lines 86 lead from the drive device 78 to the individual ceramic cells 76 of the line of ceramic cells 76. The drive unit 78 drives the ceramic cells 76 such that a ceramic cell 76 under consideration is light-transmissive when the depression lying opposite the appertaining ceramic cell 76 contains ink that is to be used for printing given the next transport past at a position P5. The light coming from the flashbulb 72 can then proceed through the appertaining ceramic cell 76 onto the ink. The light energy evaporates tensides that are situated at the surface of the ink. The result is that the surface tension of the inks rises and the wetting angle becomes larger. When, in contrast, the ink situated in a specific depression is not to be employed for printing a picture element, then the ceramic cell 76 lying thereopposite is darkened with the assistance of the control device 78, so that no light from the flashbulb 72 can be incident onto the depression. The surface tension and the wetting angle of the ink remain unaltered.

As explained above on the basis of Figure 1, there are depressions wherein the surface of the printing fluid has the condition I after a row of depressions has been transported past the position P4. The surface of the ink has the condition II in other depressions.

5 A transfer printing zone 92 is located at the position P5 between the printing drum 10a and a transport roller 90. The longitudinal axis of the transport roller 90 lies parallel to the axis of the printing drum 10a. A transport device (not shown) turns the transport roller 90 in a direction opposite that of the printing drum 10a, see arrow 94. Continuous form paper 96 is transported in a transport direction 98
10 between printing drum 10a and transport roller 90. The continuous form paper 96 lies against the surface of the transport roller 90.

Continuous form paper 96 and the surface of the printing drum 10a have the same speed in the region of the transfer printing zone 92, so that they are at rest relative to one another. That surface of the continuous form paper 96 facing toward
15 the printing drum 10a has a spacing from the surface of the printing drum 10a that is smaller than the spacing B, see Figure 1. In the region of the transfer printing zone, the continuous form paper 92 is printed at locations that lie opposite depressions whose ink has a high surface tension and, thus, a great curvature at the surface, condition II.

20 After the depressions have been transported past the position P5, there are depressions in which ink 56 is still present. The ink 56 was removed from other depressions when printing in the transfer printing zone 72. A cleaning station 100 is located at a position P6. The cleaning station 100 contains a cleaning drum 102 whose longitudinal axis lies parallel to the longitudinal axis of the printing drum 10a.

10

15

20

parallel to the printing drum 10b. The surface of the cleaning drum 102b is formed by an elastic coating 200. The surface of the coating 200 touches the printing drum 10b along a cleaning region 202. The cleaning drum 102b turns in the same sense as the printing drum 10b, see arrow 204.

5 A stripper drum 206 lies parallel to the cleaning drum 102b at that side of the cleaning drum 102b facing away from the cleaning region 202. The stripper drum 206 turns in a direction opposite that of the cleaning drum 102b, see arrow 208. A doctor blade 210, whose downwardly directed lower edge is arranged above a collecting basin 108b, is located under the stripper drum 206.

10 The cleaning drum 102b removes ink from the depressions that remained in the depressions of the printing drum 10b. Due to the rotational movement of the cleaning drum 102b, the removed ink is transported to the stripper drum 206 and proceeds onto the stripper drum 206 at a stripping region 212. The ink that is stripped off is then transported to the doctor blade 210 by the stripper drum 206
15 along the circumferential direction of the stripper drum 206. The doctor blade 210 squeegees the ink from the stripper drum 206. The ink drips from the doctor blade 210 into the collecting basin 108. The collecting basin 108b is connected via a compensating line 110b to a reservoir 62b of an inking station 54b. The compensating line 110b runs through a filter unit 213 than contains a fine-pore filter
20 in which paper fibers and dried ink collect. In another exemplary embodiment, a catalyst substance that decomposes foreign bodies in the ink is employed in the filter unit.

An ultrasound bath 214 is arranged under the shaft of the printing drum 10b between the cleaning station 100b and the inking station 54b. The ultrasound bath

214 contains a container 216 whose upper edges lie against the printing drum 10b. The container 216 is completely filled with a solvent-containing cleaning fluid 218. An ultrasound transmitter 220 in the floor region of the container 216 sends ultrasound waves through the cleaning fluid 218 to the surface of the printing drum 10b. When depressions of the printing drum 10b move past the ultrasound bath 214, then the depressions immerse into the cleaning fluid 218 and are filled with cleaning fluid 218. The cleaning fluid 218 forms a transmission medium for the ultrasound, so that the ultrasound proceeds up to the sidewalls of the depressions and strips foreign bodies adhering thereto off. When the depressions leave the ultrasound bath 214, then the cleaning fluid runs out due to gravity and remains in the container 216.

The depressions that are emptied at the cleaning station 100b and cleaned in the ultrasound bath 214 are transported to the inking station 54b due to the rotational motion of the printing drum 10b. The inking station 54b contains a scoop drum 58b that is arranged parallel to the printing drum 10b and turns in a direction opposite the rotational sense of the printing drum 10b, see arrow 60b. The scoop drum 58b dips into the ink 56b that is present in the reservoir 62b. Due to the rotational motion of the scoop drum 58b, ink is transported from the reservoir 62b to the printing drum 10b. The depressions moving past at the inking station 62b are filled with ink 56b in an inking region 222. A doctor blade (not shown) subsequently serves the purpose of squeegeeing ink not situated inside depressions from the printing drum 10b. Moreover, the employment of the doctor blade also causes the printing fluid in the depressions to arc inward.

Figure 4 shows a magnified illustration of the cleaning region 202.

Depressions 230 through 242 in the surface of the printing drum 10b are shown disproportionately large in Figure 4. After being transported past the transfer printing location 92 (see Figure 2), printing fluid 252, 256, 260 or, respectively, 262 was present in the depressions 232, 236, 240 or, respectively, 242. The coating 200 is composed of an elastic material and presses into the depressions in the cleaning region, see depression 236. Due to the force of adhesion between the printing fluid 256 and the coating 200, the printing fluid 256 is pulled out of the depression 236. The printing fluid 260 or, respectively, 262 that was present in the depression 240 or, respectively, 242 was already transferred onto the coating 200 at the cleaning region 202.

Figure 5 shows a portion of a cleaning station 100c that is constructed essentially like the cleaning station 100b. Instead of the cleaning drum 102b, a cleaning drum 102c that likewise has an elastic coating 200c at its surface is employed in the cleaning station 100c. The cleaning drum 102c and a printing drum 10c, both of which are fabricated of a metallic material, lie opposite one another at a cleaning region 202c. A potential is generated on the printing drum 10c with the assistance of a voltage U1. A voltage U2 generates a potential on the surface of the cleaning drum 102c that is lower than the potential on the surface of the printing drum 10c. The difference in potential leads thereto that printing fluid 252c, 256c, 260c or, respectively, 262c easily releases from depressions 232c, 236c, 240c or, respectively, 242c when the printing drum 10c and the cleaning drum 102c rotate in opposite directions relative to one another, see arrows 52c and 204c. In another exemplary embodiment, one of the voltages U1 or, respectively, U2 is reversed in

polarity, so that the potential on the printing drum 10c has a different operational sign from the potential on the cleaning drum 102c.

Figure 6 shows a cleaning station 100d that is employed instead of the cleaning station 100. A printing drum 10d turns in a counter-clockwise direction, see arrow 52d. A blower unit 260 is arranged under the shaft of the printing drum 10d. A discharge nozzle 262 is directed onto the surface of the printing drum 10d along the longitudinal direction of the printing drum 10d. The blower unit 216 generates a pressure p that is higher than the atmospheric pressure p_{atm} . This results in the air being blown through the discharge nozzle 262 into the depressions on the surface of the printing drum 10d. The air stream forces the printing fluid that has remained in the depressions out into a collecting basin 108d. The cleaning station 100d is surrounded by a housing (not shown) that prevents printing fluid from splattering out of the cleaning device 100d.

Figure 7 shows a cleaning station 100e that is employed instead of the cleaning station 100. A printing drum 10e rotates in a counter-clockwise direction, see arrow 52e. The cleaning station 100e contains a suction unit 270 that is arranged under the shaft of the printing drum 10e. An intake nozzle 272 of the suction unit 270 is directed such that an intake opening extends along the longitudinal direction of the printing drum 10e and lies at a short distance opposite the depressions moving past the cleaning station 100e.

A pressure p that is lower than the atmospheric pressure p_{atm} prevails in the suction unit 270. Air is thus sucked into the suction unit 270 through the intake nozzle 272. In common with the air, printing fluid that has remained in the depressions after being transported past the transfer printing location 92 is also

suctioned off from the printing drum 10e. A drain channel 274 of the suction unit 270 discharges into a collecting basin 108e. The printing fluid that has been suctioned from the surface of the printing drum 10e proceeds from the inside of the suction unit 270 through the drain channel 274 and into the collecting basin 108e. A connection between collecting basin 108e and reservoir 62 is not shown in Figure 7.

Although other modifications and changes may be suggested by those skilled in the art, it is the intention of the inventors to embody within the patent warranted hereon all changes and modifications as reasonably and properly come within the scope of their contribution to the art.

(12) NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES
PATENTWESENS (PCT) VERÖFFENTLICHTE INTERNATIONALE ANMELDUNG

(19) Weltorganisation für geistiges Eigentum
Internationales Büro



(43) Internationales Veröffentlichungsdatum
11. Januar 2001 (11.01.2001)

PCT


(10) Internationale Veröffentlichungsnummer
WO 01/02170 A1

- (51) Internationale Patentklassifikation?: **B41J 2/005, B41M 1/10**
- (21) Internationales Aktenzeichen: **PCT/EP00/06026**
- (22) Internationales Anmeldedatum:
28. Juni 2000 (28.06.2000)
- (25) Einreichungssprache: **Deutsch**
- (26) Veröffentlichungssprache: **Deutsch**
- (30) Angaben zur Priorität:
199 30 129.8 30. Juni 1999 (30.06.1999) **DE**
- (71) Anmelder (für alle Bestimmungsstaaten mit Ausnahme von US): **OCÉ PRINTING SYSTEMS GMBH [DE/DE]; Siemensallee 2, D-85586 Poing (DE).**
- (72) Erfinder; und
- (75) Erfinder/Anmelder (nur für US): **BERG, Martin [DE/DE]; Oleansstr. 5a, D-81669 München (DE). WIEDEMER, Manfred [DE/DE]; Camerloherstrasse 45, D-85737 Ismaning (DE).**
- (74) Anwälte: **SCHAUMBURG, Karl-Heinz usw.; Postfach 86 07 48, D-81634 München (DE).**
- (81) Bestimmungsstaaten (national): **JP, US.**

[Fortsetzung auf der nächsten Seite]

(54) Title: METHOD AND DEVICE FOR PRINTING A BASE MATERIAL AND CLEANING A PRINTING ROLLER

(54) Bezeichnung: VERFAHREN UND DRUCKVORRICHTUNG ZUM BEDRUCKEN EINES TRÄGERMATERIALS UND ZUM REINIGEN EINER DRUCKWALZE

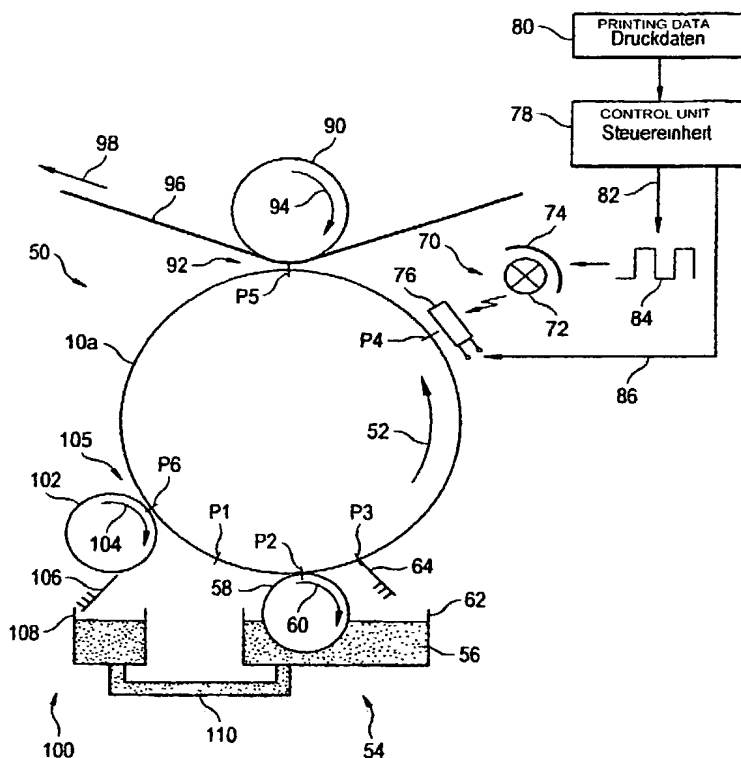

(57) Abstract: A method and device for printing a base material (96), whereby a printing roller (10a) provided with a plurality of recesses arranged on the surface of said printing roller (10a) for receiving printing fluid during a printing process rotates about its longitudinal axis. A cleaning station (100) and an inking station operate simultaneously during said printing process.

(57) Zusammenfassung: Erläutert wird ein Verfahren zum Bedrucken eines Trägermaterials (96), bei dem sich eine Druckwalze (10a) mit einer Vielzahl auf der Oberfläche der Druckwalze (10a) angeordneter Vertiefungen zur Aufnahme von Druckflüssigkeit während eines Druckvorgangs um ihre Längsachse dreht. Eine Reinigungsstation (100) und eine Einfärbestation (54) sind während des Druckvorgangs gleichzeitig in Betrieb.

WO 01/02170 A1

METHOD AND PRINTER DEVICE FOR PRINTING A CARRIER MATERIAL AND FOR CLEANING A PRINTING DRUM

The invention is directed to a method for printing a carrier material, whereby a printing drum with a plurality of depressions arranged on the surface of the printing drum for the acceptance of printing fluid turns around its longitudinal axis during a printing event. With the assistance of an inking station, printing fluid is introduced during the printing event into all depressions that move past the inking station. At a transfer printing location, the printing fluid contained in some of the depressions moving past the transfer printing location is employed for printing the carrier material. The printing fluid in the other depressions moving past the transfer printing location remains in the depressions.

European Letters Patent EP 0 756 544 B1 discloses a thermoelectric printing unit for the transfer of an ink onto a recording medium. An inking station, a transfer printing station and a cleaning station are arranged around a printing drum having a plurality of depressions for the acceptance of ink. Only the inking station and the transfer printing station are in operation during the printing event. The depressions proceed to the inking station after they have passed by the transfer printing station. Printing fluid is re-introduced into the emptied depressions at the inking station. The cleaning station is actuated only after the end of the printing event.

DE 295 07 416 U1 discloses a rotogravure unit wherein a rotogravure printing cylinder has ink-accepting depressions at image locations and no such depressions at non-imaging locations. The depressions are filled with ink at an inking station. This ink is transferred onto a rubber cylinder for later transfer onto paper. Subsequently, the ink residues are washed from the depressions of the image locations on the rotogravure printing cylinder with the assistance of a water jet and are thus removed.

DE 195 44 099 A1 discloses a thermographic printer device wherein a glass cylinder has a cup structure on its generated surface, the cups thereof being filled with ink. The ink in the cups is solidified with the assistance of a cooling device. In a printing zone, the ink in selected cups is melted with the assistance of laser light dependent on the image structure to be printed and is transferred onto paper. A doctor

blade strips the residues of the ink from the surface of the inking cylinder, the cups thereof being subsequently re-filled with ink.

DE 195 03 951 A1 discloses a rotogravure method, whereby a rotogravure printing cylinder is filled with ink in depressions at imaging locations, said ink being
5 directly printed onto a carrier material. After the printing event, the specific depressions are cleaned of ink residues and re-filled with ink for a further printing event.

DE 16 11 272 C2, further, discloses an offset rotary printing press that has a printing cylinder on whose generated surface a planographic form is chucked. This
10 planographic form accepts ink in depressions that correspond to image locations to be inked, said ink being supplied via an ink application roller. The ink that is not picked up by the printing cylinder is removed from the ink application roller and is supplied to the ink circulation.

An object of the invention is to specify a method for printing a carrier material
15 that is simple and enables a printing with high printing quality. Moreover, a printer device suitable for the implementation of the method should be recited.

The object relating to the method is achieved with the method steps indicated in patent claim 1. Developments are recited in the subclaims.

The invention proceeds on the basis of the perception that a printing having
20 high printing quality can only be achieved when all depressions are completely emptied before the depressions are transported past the inking station and a filled anew with printing fluid by the inking station. This is particularly significant in printing methods wherein the volume of a respective depression prescribes the volume of printing fluid to be applied onto a picture element. Even given depressions
25 whose printing fluid is used during printing, it is not assured that all of the printing fluid can be applied onto the carrier material. This is especially true when, due to adhesive forces between printing fluid and carrier material, the printing fluid is sucked toward the carrier material. In this case, driving the printing fluid out of the depression is foregone, this, for example, being implemented with the assistance of a
30 gas bubble.

The inventive method therefore employs a cleaning station that removes printing fluid from depressions moving past the cleaning station. The cleaning station and the inking station operate simultaneously during the printing event. In the inventive method, thus, the printing fluid is removed from all depressions before the
5 impressions are employed in a new printing event. Due to the removal of the printing fluid in the cleaning station, printing fluid is also prevented from drying on the sidewalls of the depressions during the printing event. The volume capacity of the depressions remains unmodified during the entire printing event. Printing fluid is also prevented from remaining in a depression over a plurality of revolutions of the
10 printing drum and physically or chemically changing during this time, for example in terms of viscosity or composition when highly volatile tensides are contained in the printing fluid.

What the utilization of the inventive method achieves is that a prescribed quantity of printing fluid having a prescribed composition and prescribed physical
15 parameters can be employed for each picture element even given continuous mode. The result is a print image having high quality.

In a development of the inventive method, the cleaning station contains a cleaning drum that lies parallel to the printing drum and whose surface touches the surface of the printing drum in a cleaning region during cleaning. The surface of the
20 cleaning drum is manufactured of an elastic or of an absorbent material that can be pressed into the depressions. The employment of a cleaning drum is a simple possibility for removing printing fluid that remains in the depressions. Given an elastic surface of the cleaning drum, this can be pressed against the printing drum in an enlarged cleaning region. The printing fluid remaining in the depressions thus has
25 comparatively more time to attach to the surface of the cleaning drum. Cleaning drums at whose surface bristles are arranged are also employed. The cleaning device must lie tightly against the printing drum in order to avoid a contamination of the printing unit due to printing fluid that spatters during brushing.

In another development, the cleaning drum carries a potential that differs from
30 the potential of the surface of the printing drum. This measure facilitates the release of the printing fluid from the depressions because the electrostatic forces attract the

30 In a next development, the cleaning fluid is moved by additional measures that proceed beyond the movement of the cleaning fluid due to the immersion of the

printing drum. The employment of ultrasound assures that dirt particles that adhere very firmly to the sidewalls can also be released. Moreover, larger dirt particles are comminuted by the ultrasound.

In one development of the inventive method, the cleaning station contains a
 5 blower with whose assistance air is blown into the depressions moving past the cleaning station. When the air is blown into the depressions, the printing fluid is blown out at the same time. Blowing the air in is implemented thereat instead of or in combination with the cleaning by the cleaning drum.

In a next development, a suction pump is employed in the cleaning station, air
 10 being suctioned out of the depressions moving past the cleaning station with the assistance thereof. Printing fluid remaining in the depressions is also removed simultaneously with the air. A spattering of printing fluid does not occur in the suctioning, so that measures to prevent spattering printing fluid need not be undertaken.

When, in a next development, the printing fluid removed in the cleaning
 15 station is collected and conducted to the inking station, then a circulation derives for the printing fluid that assures that the printing fluid can be completely printed.

In a next development, the printing fluid is cleaned and/or rejuvenated at a location of the printing fluid circulation. A filtering makes it possible to remove
 20 foreign bodies and ink particles that have already dried from the printing fluid. Given a rejuvenation of the printing fluid, for example, additives such as water or solvent are introduced into the printing fluid.

The invention is also employed for a printer device that is employed for the implementation of the inventive method. The technical effects indicated above thus
 25 also apply to the inventive printer device and developments thereof.

Exemplary embodiments of the invention are explained below on the basis of the attached drawings. Shown therein are:

- Figure 1 a portion of a printing drum;
- Figure 2 a printing unit of a printer;
- 30 Figure 3 a cleaning station with a cleaning drum and an ultrasound bath;
- Figure 4 a magnified illustration of a cleaning region;

An all-around sidewall 28 of the depression 12 is arranged obliquely relative to the surface 8 of the printing drum 10. The filling of a chromatic ink 30 is facilitated by the conoidal frustum-shaped fashioning of the depression 12. The ink 30 is held within the depression 12 by capillary forces. The capillary forces are greater than the force of gravity the earth exerts on the ink 30, so that the ink also remains within the depression 12 when the opening 26 is directed down, i.e. toward the center of the earth. After the filling of the ink 30 and the squeegeeing of the printing drum 10 with a doctor blade, the surface 32 of the ink 30 has a surface tension at which a convex curvature occurs, i.e. the surface 32 of the ink 30 is arced inward. The surface 32 is in a condition I wherein a wetting angle RI has a value of

approximately 45°. The wetting angle RI is described by a vector VI of the surface tension on the surface 30 and by the side wall 28. The vector VI begins at the edge of the depression 12, i.e. at a location at which the fluid 30 adjoins the sidewall 28 or, respectively, surface 8. The volume capacity of the depression 12 is selected such that exactly that quantity of ink 30 that is required for printing a single picture element is accepted.

How a condition II of the surface 36 of the ink 34 affects the printing event shall be explained below on the basis of a printing fluid 34 within the depression 14. After being filled into the depression 14, the ink 34 also has an inwardly arced, i.e. concave surface. The surface tension of the ink 34 was increased due to the evaporation of tensides with the assistance of an exposure device (shown at the bottom in Figure 2), as a result whereof the surface 36 has arced outward. A wetting angle RII between a surface tension vector VII and the sidewall of the depression 14 has a value of somewhat above 90°. The vector VII begins at the sidewall of the depression 14 and proceeds in the direction of the surface tension of the surface 36. The starting point of the surface tension vector VII lies at the boundary between printing fluid 34 and the sidewall of the depression 14. A middle region 38 of the surface 36 projects beyond the surface 8 of the printing drum 10 by a distance B. When the depression 14 is conducted past paper to be printed upon at a distance that is less than the distance B, then a wetting of the paper occurs. The adhesion forces between paper and printing fluid 34 are higher than the capillary forces between printing fluid 34 and depression 14. All of the printing fluid 34 is therefore sucked out of the depression 14 and inks a region on the paper that is provided for a picture element.

Figure 2 shows a printing unit 50 of a printer that has a resolution of 600 dpi (dots per inch). A printing drum 10a turns in counter-clockwise direction, see arrow 52. The devices enumerated below are successively arranged along the circumferential direction of the printing drum 10a.

At the beginning of a revolution of the printing drum 10a, the depressions for printing a row that extend in longitudinal direction of the printing drum 10a are free of printing fluid, see position P1. Ink 56 is filled into the depressions of a row at an

The depressions of a row filled with ink 56 are subsequently transported by rotation of the printing drum 10a to a position P4 at which an exposure device 70 modifies the surface tension in selected depressions. The exposure device 70 contains a tubular flashbulb 72 whose longitudinal axis is arranged parallel to the longitudinal axis of the printing drum 10a. A reflector 74 that extends along the flashbulb 72 and has an arcuate crosssection is located at that side of the flashbulb 72 facing away from the printing drum 10a. The flashbulb 72 is located roughly in the focus of the reflector 74. The exposure device 70 also contains a line composed of ceramic cells 76 arranged next to one another whose transparency can be varied with the assistance of a control voltage. When exposing a row of depressions at the position P4, exactly one ceramic cell 76 is located opposite each depression. The ceramic cells 76 are transparent, ferroelectric ceramic laminae. Such ceramic laminae are known from optoelectronics. For example, such ceramic laminae are disclosed as PLZT elements in European Letters Patent EP 0 253 300 B1. However, optoelectronic elements that work according to the Kerr principle are also employed. The exposure device 70 is controlled by a drive device 78 dependent on print data 80 that define the picture elements of the print image to be printed. A clock signal 84 that clocks the flashbulb 72 synchronously with the revolution of the printing drum 10a is generated at a first

output line 82 of the drive device 78, so that each row of depressions that is moved past the position P4 is irradiated exactly once by the flashbulb 72.

Output lines 86 lead from the drive device 78 to the individual ceramic cells 76 of the line of ceramic cells 76. The drive unit 78 drives the ceramic cells 76 such that a ceramic cell 76 under consideration is light-transmissive when the depression lying opposite the appertaining ceramic cell 76 contains ink that is to be used for printing given the next transport past at a position P5. The light coming from the flashbulb 72 can then proceed through the appertaining ceramic cell 76 onto the ink. The light energy evaporates tensides that are situated at the surface of the ink. The result is that the surface tension of the inks rises and the wetting angle becomes larger. When, in contrast, the ink situated in a specific depression is not to be employed for printing a picture element, then the ceramic cell 76 lying thereopposite is darkened with the assistance of the control device 78, so that no light from the flashbulb 72 can be incident onto the depression. The surface tension and the wetting angle of the ink remain unaltered.

As explained above on the basis of Figure 1, there are depressions wherein the surface of the printing fluid has the condition I after a row of depressions has been transported past the position P4. The surface of the ink has the condition II in other depressions.

A transfer printing zone 92 is located at the position P5 between the printing drum 10a and a transport roller 90. The longitudinal axis of the transport roller 90 lies parallel to the axis of the printing drum 10a. A transport device (not shown) turns the transport roller 90 in a direction opposite that of the transport [sic] drum 10a, see arrow 94. Continuous form paper 96 is transported in a transport direction 98 between printing drum 10a and transport roller 90. The continuous form paper 96 lies against the surface of the transport roller 90.

Continuous form paper 96 and the surface of the printing drum 10a have the same speed in the region of the transfer printing zone 92, so that they are at rest relative to one another. That surface of the continuous form paper 96 facing toward the printing drum 10a has a spacing from the surface of the printing drum 10a that is smaller than the spacing B, see Figure 1. In the region of the transfer printing zone,

Figure 3 shows a cleaning device 100b that is employed in a printing unit 50b. An exposure device employed in the printing unit 50b and a transfer printing station past which the carrier material is conducted are not shown in Figure 3 since their structure is identical to the structure of the exposure device 70 or, respectively, to the structure of the transfer printing station 90 through 98. A printing drum 10b of the printing unit 50b has the same structure as the printing drum 10a and turns counter-clockwise in the direction of an arrow 52b. The cleaning station 100b is located at the printing drum 10b at approximately the same position as the cleaning station relative to the printing drum 10a, i.e. obliquely under the shaft of the printing drum 10b. A

cleaning drum 102b contained in the cleaning station 100b is arranged parallel to the printing drum 10b. The surface of the cleaning drum 102b is formed by an elastic coat 200. The surface of the coat 200 touches the printing drum 10b along a cleaning region 202. The cleaning drum 102b turns in the same sense as the printing drum 10b, see arrow 204.

A stripper drum 206 lies parallel to the cleaning drum 102b at that side of the cleaning drum 102b facing away from the cleaning region 202. The stripper drum 206 turns in a direction opposite that of the cleaning drum 102b, see arrow 208. A doctor blade 210, whose downwardly directed lower edge is arranged above a collecting basin 108b, is located under the stripper drum 206.

The cleaning drum 102b removes ink from the depressions that remained in the depressions of the printing drum 10b. Due to the rotational movement of the cleaning drum 102b, the removed ink is transported to the stripper drum 206 and proceeds onto the stripper drum 206 at a stripping region 212. The ink that is stripped off is then transported to the doctor blade 210 by the stripper drum 206 along the circumferential direction of the stripper drum 206. The doctor blade 210 squeezes the ink from the stripper drum 206. The ink drips from the doctor blade 210 into the collecting basin 108. The collecting basin 108b is connected via a compensating line 110b to a reservoir 62b of an inking station 54b. The compensating line 110b runs through a filter unit 213 than contains a fine-pore filter in which paper fibers and dried ink collect. In another exemplary embodiment, a catalyst substance that decomposes foreign bodies in the ink is employed in the filter unit.

An ultrasound bath 214 is arranged under the shaft of the printing drum 10b between the cleaning station 100b and the inking station 54b. The ultrasound bath 214 contains a container 216 whose upper edges lie against the printing drum 10b. The container 216 is completely filled with a solvent-containing cleaning fluid 218. An ultrasound transmitter 220 in the floor region of the container 216 sends ultrasound waves through the cleaning fluid 218 to the surface of the printing drum 10b. When depressions of the printing drum 10b move past the ultrasound bath 214, then the depressions immerse into the cleaning fluid 218 and are filled with cleaning fluid 218. The cleaning fluid 218 forms a transmission medium for the ultrasound, so

that the ultrasound proceeds up to the sidewalls of the depressions and strips foreign bodies adhering thereto off. When the depressions leave the ultrasound bath 214, then the cleaning fluid runs out due to gravity and remains in the container 216.

The depressions that are emptied at the cleaning station 100b and cleaned in
5 the ultrasound bath 214 are transported to the inking station 54b due to the rotational motion of the printing drum 10b. The inking station 54b contains a scoop drum 58b that is arranged parallel to the printing drum 10b and turns in a direction opposite the rotational sense of the printing drum 10b, see arrow 60b. The scoop drum 58b dips into the ink 56b that is present in the reservoir 62b. Due to the rotational motion of
10 the scoop drum 58b, ink is transported from the reservoir 62b to the printing drum 10b. The depressions moving past at the inking station 62b are filled with ink 56b in an inking region 222. A doctor blade (not shown) subsequently serves the purpose of squeegeeing ink not situated inside depressions from the printing drum 10b. Moreover, the employment of the doctor blade also causes the printing fluid in the
15 depressions to arc inward.

Figure 4 shows a magnified illustration of the cleaning region 202. Depressions 230 through 242 in the surface of the printing drum 10b are shown disproportionately large in Figure 4. After being transported past the transfer printing location 92 (see Figure 2), printing fluid 252, 256, 260 or, respectively, 262 was
20 present in the depressions 232, 236, 240 or, respectively, 242. The coat 200 is composed of an elastic material and presses into the depressions in the cleaning region, see depression 236. Due to the force of adhesion between printing fluid 256 and coat 200, the printing fluid 256 is pulled out of the depression 236. The printing fluid 260 or, respectively, 262 that was present in the depression 240 or, respectively,
25 242 was already transferred onto the coat 200 at the cleaning region 202.

Figure 5 shows a portion of a cleaning station 100c that is constructed essentially like the cleaning station 100b. Instead of the cleaning drum 102b, a cleaning drum 102c that likewise has an elastic coat 200c at its surface is employed in the cleaning station 100c. The cleaning drum 102c and a printing drum 10c, both of
30 which are fabricated of a metallic material, lie opposite one another at a cleaning region 202c. A potential is generated on the printing drum 10c with the assistance of

a voltage U1. A voltage U2 generates a potential on the surface of the cleaning drum 102c that is lower than the potential on the surface of the printing drum 10c. The difference in potential leads thereto that printing fluid 252c, 256c, 260c or, respectively, 262c easily releases from depressions 232c, 2326c, 240c or, respectively, 242c when the printing drum 10c and the cleaning drum 102c rotate in opposite senses relative to one another, see arrows 52c and 204c. In another exemplary embodiment, one of the voltages U1 or, respectively, U2 is reversed in polarity, so that the potential on the printing drum 10c has a different operational sign from the potential on the cleaning drum 102c.

Figure 6 shows a cleaning station 100d that is employed instead of the cleaning station 100. A printing drum 10d turns in counter-clockwise direction, see arrow 52d. A blower unit 260 is arranged under the shaft of the printing drum 10d. A discharge nozzle 262 is directed onto the surface of the printing drum 10d along the longitudinal direction of the printing drum 10d. The blower unit 216 generates a pressure p that is higher than the atmospheric pressure p_{atm} . This results therein that air is blown through the discharge nozzle 262 into the depressions on the surface of the printing drum 10d. The air stream expresses printing fluid that has remained in the depressions out into a collecting basin 108d. The cleaning station 100d is surrounded by a housing (not shown) that prevents printing fluid from splattering out of the cleaning device 100d.

Figure 7 shows a cleaning station 100e that is employed instead of the cleaning station 100. A printing drum 10e rotates in counter-clockwise direction, see arrow 52e. The cleaning station 100e contains a suction unit 270 that is arranged under the shaft of the printing drum 10e. An intake nozzle 272 of the suction unit 270 is directed such that an intake opening extends along the longitudinal direction of the printing drum 10e and lies at a short distance opposite the depressions moving past the cleaning station 100e.

A pressure p that is lower than the atmospheric pressure p_{atm} prevails in the suction unit 270. Air is thus sucked into the suction unit 270 through the intake nozzle 272. In common with the air, printing fluid that has remained in the depressions after being transported past the transfer printing location 92 is also sucked

off from the printing drum 10e. A drain channel 274 of the suction unit 270 discharges into a collecting basin 108e. Printing fluid sucked up from the surface of the printing drum 10e proceeds from the inside of the suction unit 270 through the drain channel 274 and into the collecting basin 108e. A connection between
5 collecting basin 108e and reservoir 62 is not shown in Figure 7.

List of Reference Characters

	8	surface
	10,10a-10e	printing drum
	12,14	depression
5	16	row direction
	A,B	distance
	18	column direction
	20	contour
	22	axis
10	24	bottom surface
	26	opening
	28	sidewall
	30	ink
	I, II	condition
15	RI, RII	wetting angle
	VI, VII	surface tension vector
	34	ink
	36	surface
	38	region
20	40	surface of the printing drum
	50,50-52e	printing unit
	52,52b	arrow
	P1-P6	position
	54	inking station
25	56	ink
	58,58b	scoop drum
	60	arrow
	62, 62b	reservoir
	64	doctor blade
30	70	exposure device
	72	flashbulb

	74	reflector
	78	drive device
	80	print data
	82	output line
5	84	clock signal
	86	lines
	90	transport roller
	92	transfer printing zone
	94	arrow
10	96	continuous form paper
	98	transport direction
	100,100b-d	cleaning station
	102,102b-c	cleaning drum
	104	arrow
15	105	cleaning region
	106	doctor blade
	108,108b-e	collecting basin
	110,110b	compensating line
	120	self-focussing lens
20	200	coat
	202,202c	cleaning region
	204,204c	arrow
	206	stripper drum
	208	arrow
25	210	doctor blade
	212	stripping region
	213	filter unit
	214	ultrasound bath
	216	container
30	218	cleaning fluid
	220	ultrasound transmitter

Claims

1. Method for printing a carrier material (96), whereby a printing drum (10a) having a plurality of depressions (12, 14) for the acceptance of printing fluid (30, 34) arranged on the surface of the printing drum (10a) rotates around its longitudinal axis
5 during a printing event,
printing fluid (30, 34) is introduced by an inking station (54) into depressions (12, 14) moving past the inking station (54),
printing fluid (34) from some of the depressions (14) moving past a transfer printing location (92) is employed at said transfer printing station (92) for printing the carrier
10 material, and printing fluid (30) remains in the rest of the depressions (12),
printing fluid (30) is removed by a cleaning station (100) from depressions (12, 14) moving past the cleaning station (100),
and whereby the cleaning station (100) and the inking station (54) are simultaneously in operation during the printing event.
- 15 2. Method according to claim 1, characterized in that the cleaning station (100) contains a cleaning drum (102) that lies parallel to the printing drum (10a) and whose surface touches the surface of the printing drum (10a) in a cleaning region (202) during cleaning; and in that the surface of the cleaning drum (102) is manufactured of an elastic or absorbent material.
- 20 3. Method according to claim 2, characterized in that the cleaning drum (102a) carries a potential (U2) that differs from a potential (U1) on the surface of the printing drum (10a).
4. Method according to claim 2 or 3, characterized in that the cleaning station (100b) contains a stripper drum (206) that lies parallel to the cleaning drum (102b)
25 and whose surface exerts pressure onto the surface of the cleaning drum (102b) in a stripping region (212); and in that the surface of the stripper drum (102) is fabricated of a hard material (200).
5. Method according to one of the preceding claims, characterized in that the emptied depressions are cleaned with a cleaning fluid (216) after the removal of the
30 printing fluid from depressions moving past the cleaning station (100b) and before the introduction of printing fluid into depressions moving past the inking station (54b).

6. Method according to claim 5, characterized in that the cleaning station (214) contains a cleaning container (216) with a cleaning fluid (218) that is preferably arranged under the printing drum (10b); and in that depressions moving past the cleaning container (216) immerse into the cleaning fluid (218).

5 7. Method according to claim 5 or 6, characterized in that printing fluid is employed as cleaning fluid.

8. Method according to claim 6 or 7, characterized in that the cleaning fluid (216) is moved by additional measures, preferably by introduction of ultrasound (220).

10 9. Method according to one of the preceding claims, characterized in that the cleaning station (100d) contains a blower unit (260) that, with the assistance of air, displaces printing fluid out of the depressions (12, 14) moving past the cleaning station (100d).

15 10. Method according to one of the preceding claims, characterized in that the cleaning station (100e) contains a suction unit (270) with whose assistance air is sucked in, said air entraining printing fluid from the depressions (12, 14) moving past the cleaning station (100e).

20 11. Method according to one of the preceding claims, characterized in that the printing fluid removed with the assistance of the cleaning station (100) is collected; and in that the collected printing fluid is conducted to the inking station (54).

12. Method according to claim 11, characterized in that the printing fluid (56) is cleaned and/or rejuvenated.

25 13. Printer device (50) for printing a carrier material (96), comprising a printing drum (10a) rotating around its longitudinal axis during the printing event and on whose surface a plurality of depressions (12, 14) for the acceptance of printing fluid (30, 34) are arranged,
an inking station (54) for introducing printing fluid (30, 34) into depressions (12, 14) that move past the inking station (54),
a transfer printing station (94) at which printing fluid (34) from some of the
30 depressions (14) moving past the transfer printing location (92) is employed for

17. Printer device (50) according to one of the claims 13 through 16, characterized in that the cleaning device (100d) contains a blower unit (260) with whose assistance air is blown into the depressions (12, 14) moving past the cleaning station (100d); and/or in that the cleaning station (100e) contains a suction unit (270) with whose assistance air is sucked out of the depressions (12, 14) moving past the cleaning station (100e).

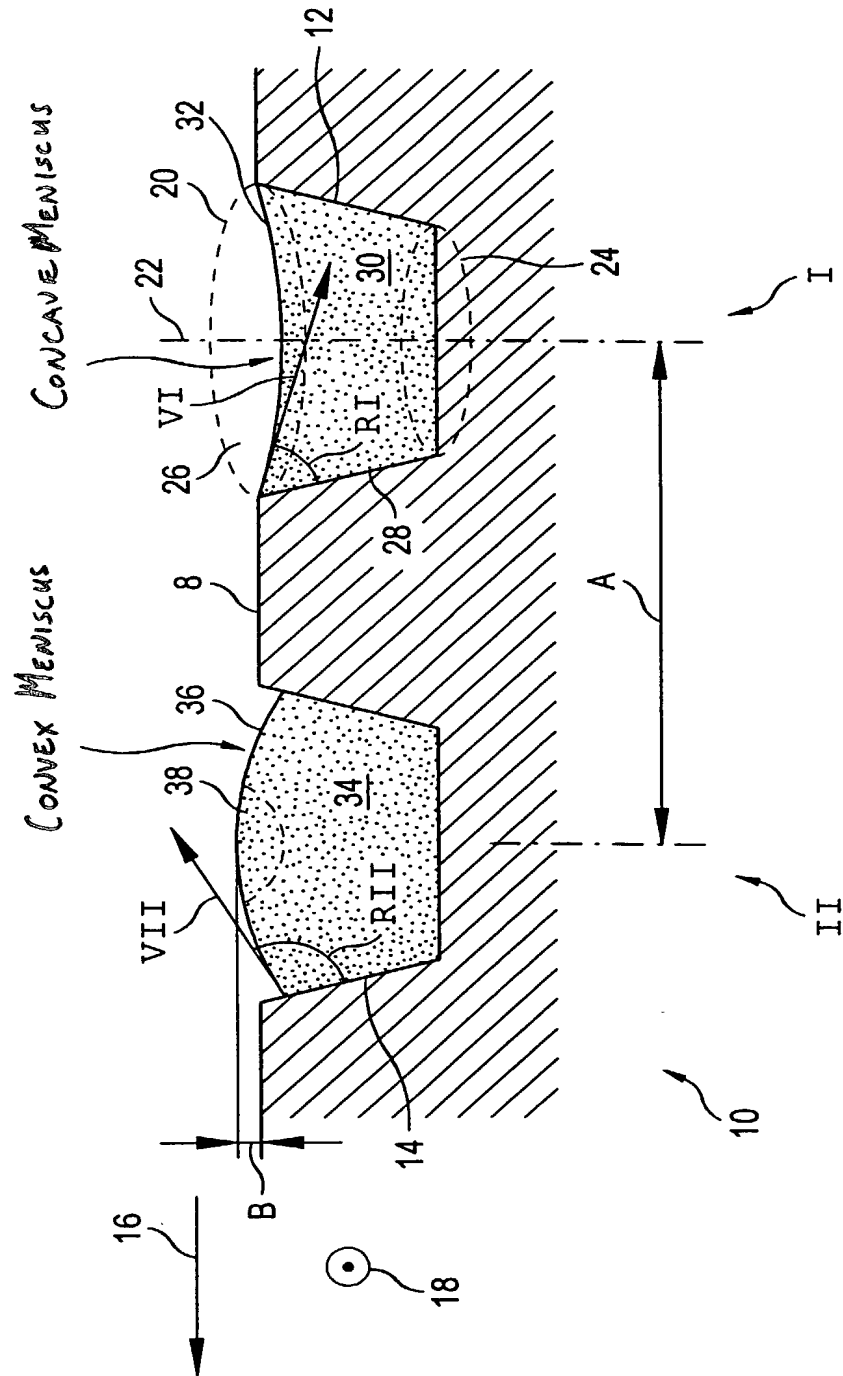


FIG. 1

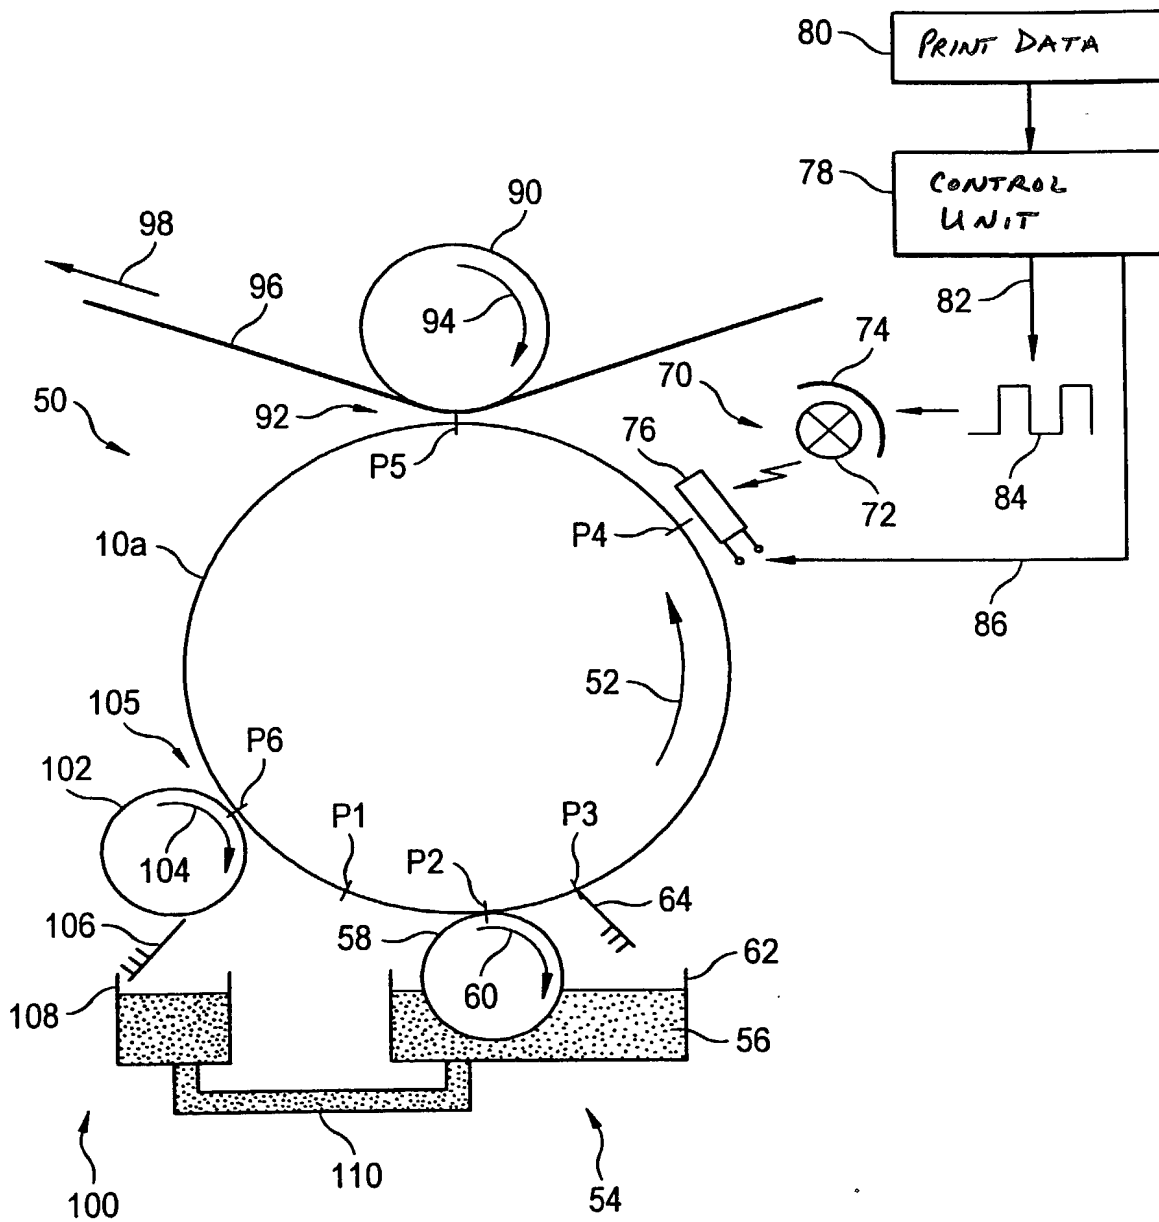


FIG.2

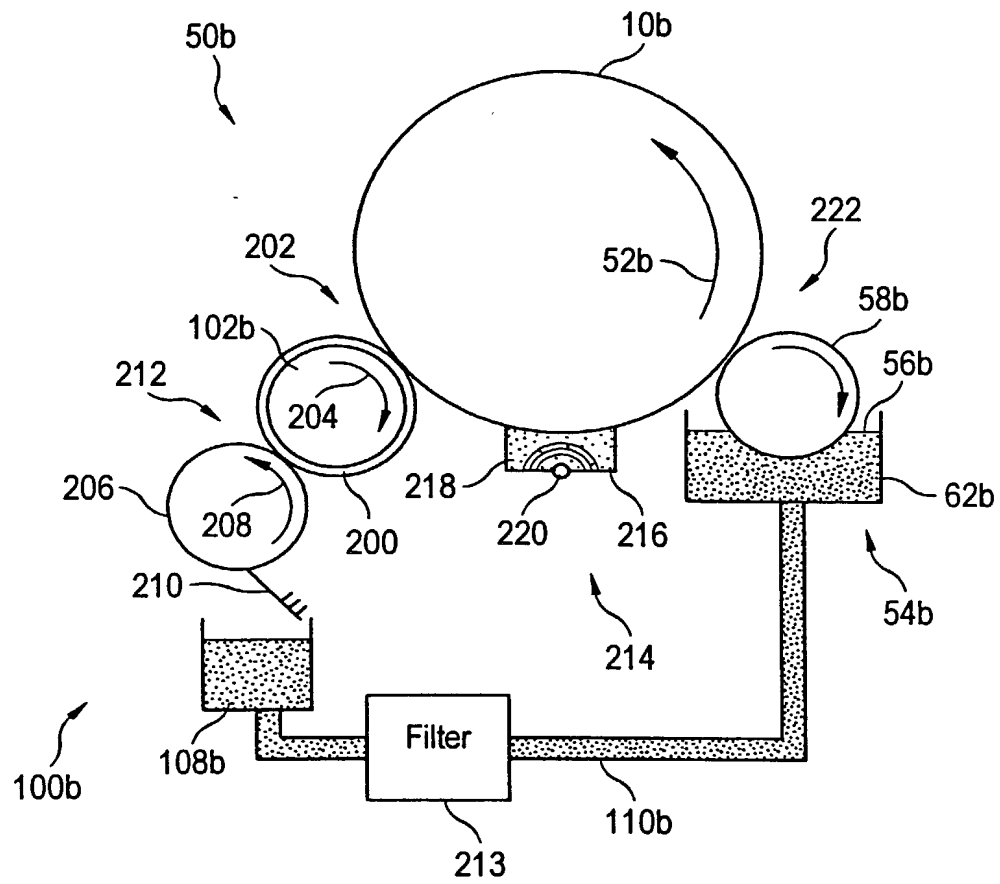


FIG.3

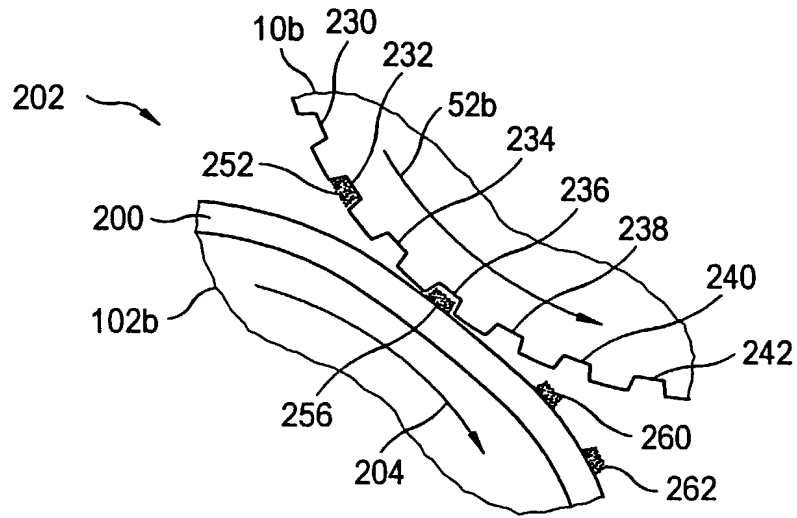


FIG. 4

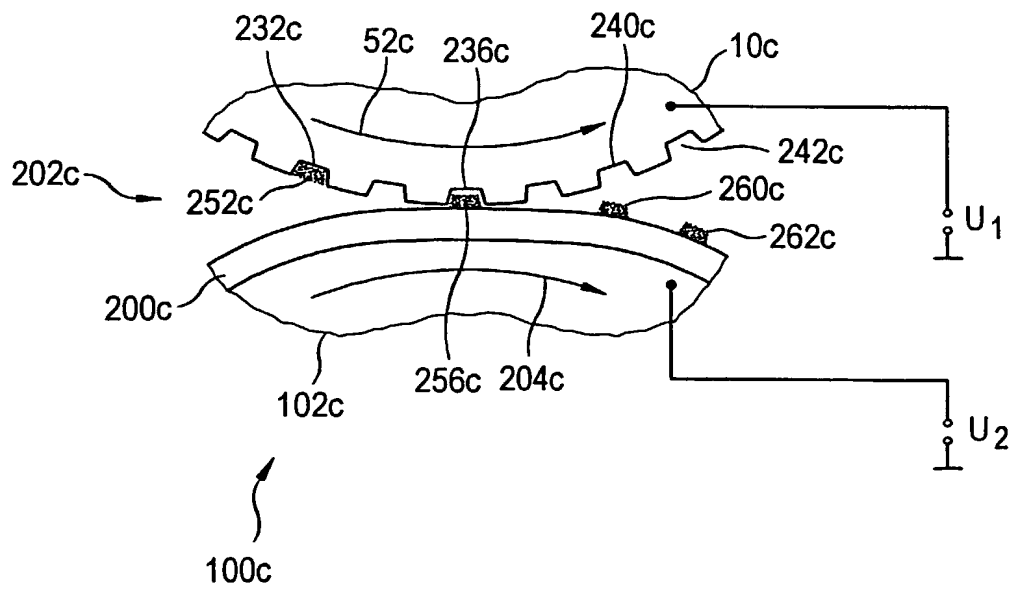


FIG. 5

5/5

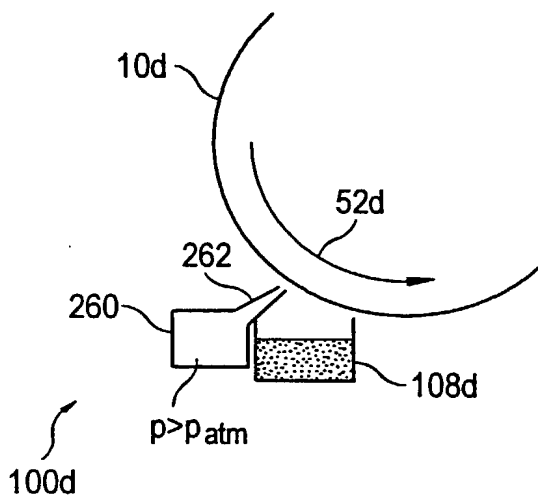


FIG. 6

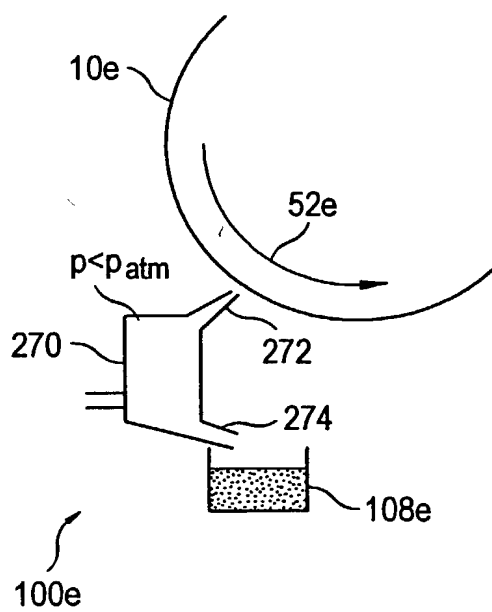


FIG. 7

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION
ERKLÄRUNG FÜR PATENTANMELDUNGEN MIT VOLLMACHT
German Language Declaration

Als nachstehend benannter Erfinder erkläre ich hiermit an Eides Statt:

dass mein Wohnsitz, meine Postanschrift, und meine Staatsangehörigkeit den im Nachstehenden nach meinem Namen aufgeführten Angaben entsprechen,

dass ich, nach bestem Wissen der ursprüngliche, erste und alleinige Erfinder (falls nachstehend nur ein Name angegeben ist) oder ein ursprünglicher, erster und Miterfinder (falls nachstehend mehrere Namen aufgeführt sind) des Gegenstandes bin, für des dieser Antrag gestellt wird und für den ein Patent beantragt wird für die Erfindung mit dem Titel:

VERFAHREN UND DRUCKVORRICHTUNG ZUM
BEDRUCKEN EINES TRÄGERMATERIALS UND
ZUM REINIGEN EINER DRUCKWALZE

deren Beschreibung

(zutreffendes ankreuzen)

☐ hier beigefügt ist.

■ am 28 June 2000 als
PCT internationale Anmeldung
PCT Anmeldungsnummer PCT/EP00/06026
eingereicht wurde und am
abgeändert wurde (falls tatsächlich abgeändert)

Ich bestätige hiermit, dass ich den Inhalt der obigen Patentanmeldung einschliesslich der Ansprüche durchgesehen und verstanden habe, die eventuell durch einen Zusatzantrag wie oben erwähnt abgeändert wurde.

Ich erkenne meine Pflicht zur Offenbarung irgendwelcher Informationen, die für die Prüfung der vorliegenden Anmeldung in Einklang mit Absatz 37, Bundesgesetzbuch, Paragraph 1.56(a) von Wichtigkeit sind, an.

Ich beanspruche hiermit ausländische Prioritätsvorteile gemäss Abschnitt 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 119 aller unten angegebenen Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde, und habe auch alle Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde nachstehend gekennzeichnet, die ein Anmeldedatum haben, das vor dem Anmeldedatum der Anmeldung liegt, für die Priorität beansprucht wird.

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

the specification of which

(check one)

☐ is attached hereto

☐ was filed on _____ as
PCT international application
PCT Application No. _____
and was amended on _____
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

German Language Declaration

Prior foreign applications
Priorität beansprucht

<u>199 30 129.8</u>	<u>Germany</u>	<u>30 June 1999</u>
(Number)	(Country)	(Day Month Year Filed)
(Nummer)	(Land)	(Tag Monat Jahr eingereicht)
<hr/>		
(Number)	(Country)	(Day Month Year Filed)
(Nummer)	(Land)	(Tag Monat Jahr eingereicht)

Priority Claimed

<input checked="" type="checkbox"/>	<input type="checkbox"/>
Yes	No
Ja	Nein

<input type="checkbox"/>	<input type="checkbox"/>
Yes	No
Ja	Nein

Ich beanspruche hiermit gemäss Absatz 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 120, den Vorzug aller unten aufgeführten Anmeldungen und falls der Gegenstand aus jedem Anspruch dieser Anmeldung nicht in einer früheren amerikanischen Patentanmeldung laut dem ersten Paragraphen des Absatzes 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 122 offenbart ist, erkenne ich gemäss Absatz 37, Bundesgesetzbuch, Paragraph 1.56(a) meine Pflicht zur Offenbarung von Informationen an, die zwischen dem Anmeldedatum der früheren Anmeldung und dem nationalen oder PCT internationalen Anmeldedatum dieser Anmeldung bekannt geworden sind.

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §122 I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

(Application Serial No.)
(Anmeldeseriennummer)

(Filing Date)
(Anmeldedatum)

(Status)
(patentiert, anhängig,
aufgegeben)

(Status)
(patented, pending,
abandoned)

(Application Serial No.)
(Anmeldeseriennummer)

(Filing Date)
(Anmeldedatum)

(Status)
(patentiert, anhängig,
aufgegeben)

(Status)
(patented, pending,
abandoned)

Ich erkläre hiermit, dass alle von mir in der vorliegenden Erklärung gemachten Angaben nach meinem besten Wissen und Gewissen der vollen Wahrheit entsprechen, und dass ich diese eidesstattliche Erklärung in Kenntnis dessen abgebe, dass wissentlich und vorsätzlich falsche Angaben gemäss Paragraph 1001, Absatz 18 der Zivilprozessordnung der Vereinigten Staaten von Amerika mit Geldstrafe belegt und/oder Gefängnis bestraft werden koennen, und dass derartig wissentlich und vorsätzlich falsche Angaben die Gültigkeit der vorliegenden Patentanmeldung oder eines darauf erteilten Patentes gefährden können.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

German Language Declaration

VERTRETUNGSVOLLMACHT: Als benannter Erfinder beauftrage ich hiermit den nachstehend benannten Patentanwalt (oder die nachstehend benannten Patentanwälte) und/oder Patent-Agenten mit der Verfolgung der vorliegenden Patentanmeldung sowie mit der Abwicklung aller damit verbundenen Geschäfte vor dem Patent- und Warenzeichenamt: (Name und Registrationsnummer anführen)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

And I hereby appoint all Attorneys identified by United States Patent and Trademark Office customer number 26574, who are all members of the firm of Schiff Hardin and Waite.

Telefongespräche bitte richten an:
(Name und Telefonnummer)

Direct Telephone Calls to: (name and telephone number)

312/258-5785

Postanschrift:

Send Correspondence to:

SCHIFF HARDIN & WAITE
Patent Department
6600 Sears Tower, Chicago, Illinois 60606

CUSTOMER NUMBER 26574

Voller Name des einzigen oder ursprünglichen Erfinders: Martin BERG		Full name of sole or first inventor:	
Unterschrift des Erfinders <i>Martin Berg</i>	Datum 13. 12. 2001	Inventor's signature	Date
Wohnsitz München, Germany DEU		Residence	
Staatsangehörigkeit German		Citizenship	
Postanschrift Oleanderstr. 5a Orleansstr. 5a		Post Office Address	
D-81669 München, GERMANY			

(Bitte entsprechende Informationen und Unterschriften im Falle von weiteren Miterfindern angeben).

(Supply similar information and signature for subsequent joint inventors).

Voller Name des zweiten Miterfinders (falls zutreffend): Manfred WIEDEMER		Full name of second joint inventor, if any:	
Unterschrift des Erfinders <i>Manfred Wiedemer</i>	Datum 12/13/2001	Inventor's signature	Date
Wohnsitz Ismaning, Germany <i>DEX</i>		Residence	
Staatsangehörigkeit German		Citizenship	
Postanschrift Camerloherstrasse 45		Post Office Address	
D-85737 Ismaning, Germany			
Voller Name des dritten Miterfinders (falls zutreffend):		Full name of third joint inventor, if any:	
Unterschrift des Erfinders	Datum	Inventor's signature	Date
Wohnsitz		Residence	
Staatsangehörigkeit		Citizenship	
Postanschrift		Post Office Address	
Voller Name des vierten Miterfinders (falls zutreffend):		Full name of fourth joint inventor, if any:	
Unterschrift des Erfinders	Datum	Inventor's signature	Date
Wohnsitz		Residence	
Staatsangehörigkeit		Citizenship	
Postanschrift		Post Office Address	

(Bitte entsprechende Informationen und Unterschriften im Falle von zweiten und weiteren Miterfindern angeben).

(Supply similar information and signature for second and subsequent joint inventors).